


32 071 Main Sink Dual Spray Pull-Out

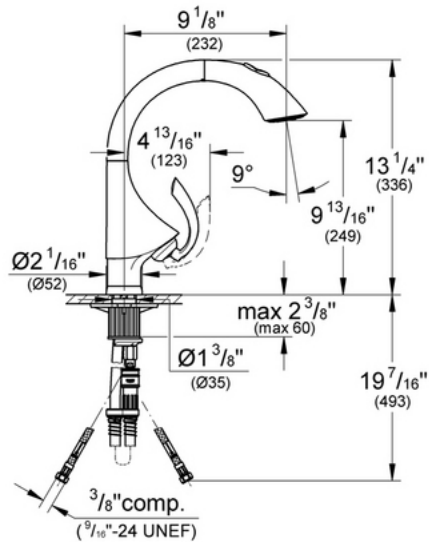

Description

GROHE RealSteel® Stainless Steel Construction (SD0 and KD0 versions)
 Solid brass body (000 version)
 Ceramic cartridge
 Dual spray control -- switches back and forth between regular flow and spray
 SpeedClean anti-lime system
 Single lever handle
 Variable handle positioning (left, right, or center and all points in between)
 9 1/8" spout reach

Flow Rate

2.2 gpm at 60 psi, 2.5 gpm at 80 psi
 (9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
 ANSI/NSF Standard 61
 ADA Compliant

Finish Options

32 071 OOO Starlight® Chrome
 32 071 SDO Stainless Steel
 32 071 KDO Stainless Steel/Black
 32 071 DCO SuperSteel