



32 170 Single Spray Pull-Out

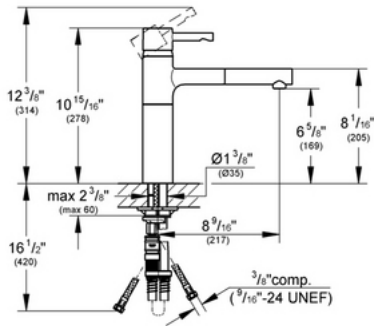

Description

GROHE SilkMove®; Ceramic Cartridge
 SpeedClean®; Anti-Lime System
 Stainless Steel Braided Flexible Supplies
 Quick Installation System
 Single Lever Handle
 8 9/16" Spout Reach

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi
 (9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
 ADA Compliant

Finish Options

32 170 000 Starlight® Chrome
 32 170 DCO SuperSteel