


32 244 Main Sink Dual Spray Pull-Down

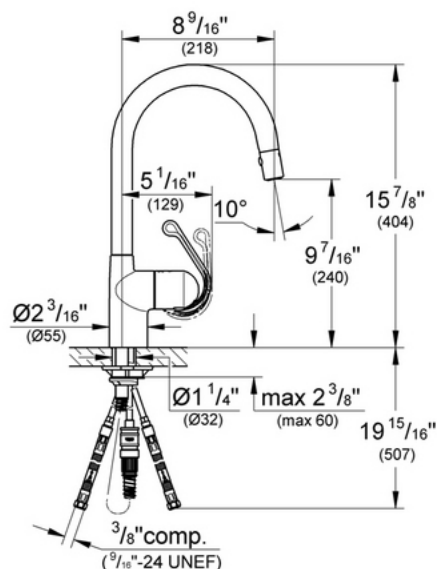

Description

-LIMITED AVAILABILITY-

GROHE SilkMove® ceramic cartridge
SpeedClean anti-lime system
Locking Push Button Control - to switch from regular flow to spray
Quick installation system
Single lever handle
Variable handle positioning
Stainless steel braided flexible supplies
56" extractable hose
8 9/16" spout reach
360° swivel spout

IAPMO file # 1750

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi
(9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61
ADA Compliant

Finish Options

32 244 OOO Starlight® Chrome
32 244 DCO SuperSteel